

538863

10/538863

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
8 July 2004 (08.07.2004)

PCT

(10) International Publication Number
WO 2004/057151 A1

(51) International Patent Classification⁷: **E21B 33/138**,
17/10, 21/00

(21) International Application Number:
PCT/GB2003/005520

(22) International Filing Date:
17 December 2003 (17.12.2003)

(25) Filing Language: English

(26) Publication Language: English


(30) Priority Data:
0229865.1 21 December 2002 (21.12.2002) GB

Parkstraat 83-89, NL-2514 JG The Hague (NL). **PETROLEUM RESEARCH AND DEVELOPMENT N.V.** [NL/NL]; De Ruyterkade 62, Willemstad, Curacao (AN). **SCHLUMBERGER CANADA LIMITED** [CA/CA]; 525 - 3rd Avenue S.W., Calgary, Alberta T2P 0G4 (CA). **SCHLUMBERGER SEACO INC.** [PA/PA]; 8 Calle Aquilino de la Guardia, Panama City (PA). **SCHLUMBERGER HOLDINGS LIMITED** [—/—]; P.O. Box 71, Craigmuir Chambers, Road Town, Tortola (VG). **SCHLUMBERGER OILFIELD ASSISTANCE LIMITED** [—/—]; Craigmuir Chambers, Road Town, Tortola (VG). **SCHLUMBERGER OVERSEAS S.A.** [PA/PA]; 8 Calle Aquilino de la Guardia, Panama City (PA). **SCHLUMBERGER SURENCO S.A.** [PA/PA]; 8 Calle Aquilino de la Guardia, Panama City (PA). **SERVICES PETROLIERS SCHLUMBERGER** [FR/FR]; 42, rue Saint-Dominique, F-75007 Paris (FR).

(71) Applicants (for all designated States except US): **SCHLUMBERGER TECHNOLOGY B.V.** [NL/NL]; (72) Inventors; and (75) Inventors/Applicants (for US only): **COOPER, Iain**

[Continued on next page]

(54) Title: WELLBORE CONSOLIDATING TOOL FOR ROTARY DRILLING APPLICATIONS

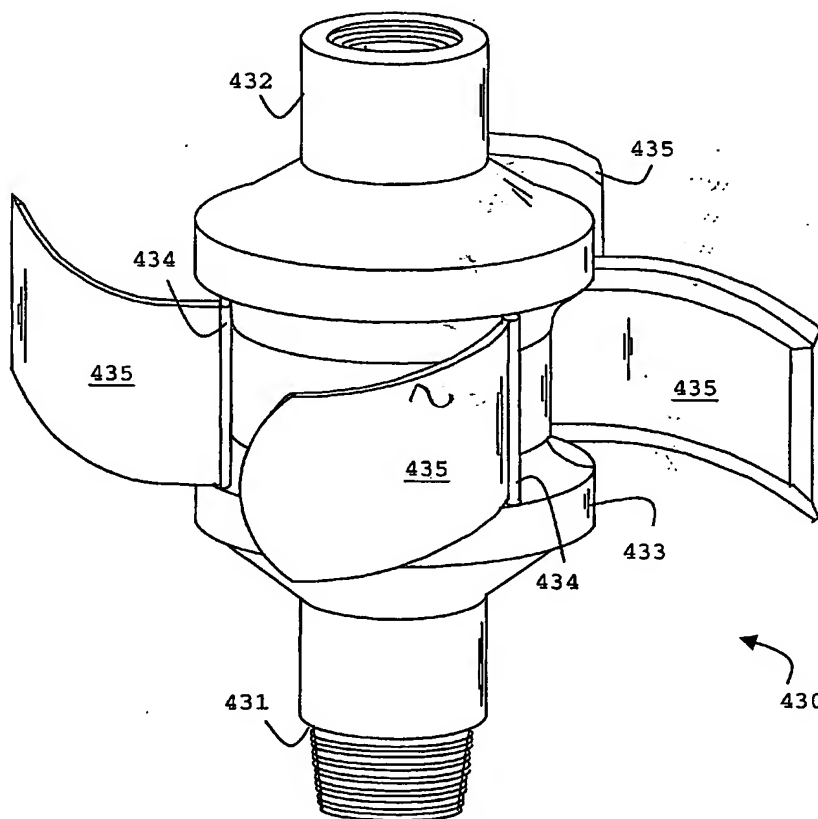

(57) Abstract: A subpart (430) of a drill string (211) is described having an outer circumferential surface which is contoured and adapted to engage the wall of the borehole with a small angle of attack while exerting during rotary drilling operations an compacting pressure on mud cake and/or cuttings present in the annulus between the drill string and the borehole.

WO 2004/057151 A1



[GB/GB]; 14 Parsonage Way, Linton, Cambridgeshire CB1 6YL (GB). **VERCAEMER, Claude** [FR/FR]; 8 Avenue de Lowendal, F-75007 Paris (FR). **LESSO, William** [US/GB]; 8 Chesterford House, Southacre Drive, Cambridge CB2 2TZ (GB). **JEFFRYES, Benjamin, Peter** [GB/GB]; 20 Station Road, Histon, Cambridgeshire CB4 9LQ (GB). **SHEPPARD, Michael, Charles** [GB/GB]; Services Techniques Schlumberger, Le Palatin 1, Cours du Triangle, 92936 La Défense-Cedex (FR).

(74) **Agent: MIRZA, Akram, K.**; Intellectual Property Law Department, Schlumberger Cambridge Research Limited, High Cross, Madingley Road, Cambridge CB3 0EL (GB).

(81) **Designated States (national):** AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,

MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) **Designated States (regional):** ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Wellbore Consolidating Tool for Rotary Drilling Applications

The present invention generally relates to apparatus and methods for improving the stability of a wellbore during drilling operations using a rotary drill string. More specifically, it relates to such apparatus and methods to enhance the performance of the filter or mud cake layer on the wall of the wellbore as protective and isolating layer.

BACKGROUND OF THE INVENTION

To obtain fluids, such as oil and gas, from a subterranean reservoir boreholes or wells are drilled from the surface into the reservoir. The most commonly applied method to drill a well uses a derrick or mast structure, in which a drill string is assembled and continuously extended into the borehole as the drilling progresses. Drilling is performed by rotating a drill bit attached to the end of the drill string. During the drilling process pressurized drilling fluid (commonly known as "mud" or "drilling mud") is pumped from the surface into the hollow drill string to provide lubrication to various members of the drill string including the drill bit. On its way back to the surface through the annulus between drill string and the wall of the borehole, the drilling fluid removes the cuttings produced by the drill bit.

In most cases the pressure exerted by the drilling fluid is above the formation or pore pressure to prevent the entry of formation fluids into the wellbore during the drilling process. As a beneficial side effect, a small amount of pressurized mud enters into porous sections of the formation

as it flow across those, thus leaving behind a layer of larger particles on the borehole wall. This layer is referred to as filter or mud cake. The mud cake layer prevents further fluid loss, which can be harmful, damaging formation permeability and lubricating fractures.

The barrier provided by the mud cake can potentially increase the so-called "mud window". The mud window is a pressure range in which the driller maintains the mud pressure. The mud pressure should be sufficiently high to prevent influx from the formation whilst being low enough to prevent a fracturing of the formation and lost circulation. A wider mud window has the advantage of effectively increasing the distance that can be drilled before the open borehole requires a casing. With an increased distance between subsequent casing shoes or points, the drilling operation can be completed in a shorter time period and at reduced costs.

Considerable efforts have therefore been made to optimize the filter cake as a protective layer - mostly by adding suitable chemical compositions to the base drilling fluid in order to increase the stability of the mud cake and the adjacent formation or to increase its capability of the mud cake layer to isolate the borehole from the surrounding formation.

In the patent document SU 1361304 a bit with two off-set pairs of rollers is described for a compacting action onto the wall of a borehole. The roller are described as cylindrical rubber cased sleeves. However rubber when exposed to the hostile environment close to the drill bit

exhibits a high degree of wear and tear, making the tool impractical for most applications.

In the light of the above, it is an object of the present invention to advantageously condition the interface layer between an open uncased wellbore and the surrounding formation during drilling operations.

SUMMARY OF THE INVENTION

In accordance with a first aspect of the invention, there is provided a subpart of a drill string with a drill bit, which subpart including an outer circumferential surface that is contoured and adapted to engage the wall of the borehole with a small angle of attack in a sliding action while exerting a compacting pressure on mud cake and/or cuttings present in the annulus between the drill string and the wall.

In accordance with another aspect of the invention, there is provided a subpart of a drill string, wherein, under operating conditions, the outer circumferential surface of the subpart has a nominal outer diameter of at least 70 per cent of the nominal diameter of the borehole, openings or grooves to allow the passage of drilling fluid from the drill bit to the surface and is adapted to engage the wall of the borehole in horizontal direction at an angle of attack of less than 45 degrees.

A drill string for use in the present invention may be a conventional jointed drill string or a continuous coiled

drill string. The invention can, however, not be applied to casing drilling operations where the drill string is assembled up from casing tubes. A subpart is a part adapted to be incorporated into the drill string or into the bottom hole assembly (BHA) including the drill collars. The subpart is directly coupled to the drill string and rotates together with the whole drill string. The drill string in turn is rotated from a rig located at the surface.

10 For the purpose of the present invention the nominal outer diameter is defined as the minimal circle to include the outer circumferential surface of the subpart at an arbitrary horizontal cross-section. This outer diameter, when variable, is assumed by the subpart under operating
15 conditions, i.e., during the actual drilling and may be smaller for some embodiments during other operations such as assembling and tripping. The nominal diameter of an open borehole is its envisaged diameter as appearing in the relevant drilling schedule and is essentially determined by
20 the active width of the drill bit or any underreamer following the drill bit.

In preferred variants of the invention the nominal outer diameter (OD) may exceed 80, 90 or even 95 per cent of the
25 nominal bore hole diameter, as the subpart is configured to remain in continuous contact with the wall of the borehole as the subpart rotates with the drill string. Furthermore, a larger OD can provide a smaller angle of attack and a larger area of contact.

30

It will be appreciated by those skilled in the art that in conventional drilling including coiled tubing but excluding

casing drilling, subs with such a large OD are rarely used. As mentioned above, in a typical drill string make-up the drill bit (or any underreamer following it) defines the nominal borehole diameter. The other parts of the drill

5 string are usually optimized to exhibit a small outer diameter so as to interfere as little as possible with the wall of the well as it is being drilled. Certain types of steerable motors assemblies make use of extendable members that push the drill bit in a predetermined direction.

10 However, usually only one of these members is extended so that the outer OD of such a steerable motor assembly, following the definition of the outer OD as given above, remains small compared to the diameter of the borehole at any given point in time. Exceptionally so-called

15 stabilizers, centralizers or tool joint protectors may exceed the above given limits. These parts however are generally not designed to preserve and enhance the integrity of the mud cake. To the contrary, the stabilizers usually include sections that contact the wall of the borehole with

20 a low angle of attack. The same applies to expandable underreamers.

The subpart in accordance with the above aspect of the invention, however, is adapted to engage with the wall of

25 the well at a low angle of attack so as to minimize any scraping or cutting action of the subpart on the mud cake or formation wall. Instead, the subpart is designed slide on the filter cake in a motion similar to plastering walls, hence without destroying the integrity of the filter cake

30 layer but exerting pressure to compact the filter cake layer. The angle of attack is defined as the angle between the cutting edge of the tool and the plane tangential to the

surface to which the tool is applied and at the point or line of contact. The angle of attack, thus defined, can range from 0 degrees to 180 degrees. For the purpose of the invention no cutting or gouging action is intended to be performed by the subpart. The edge or face of the subpart that engage the wall are shaped to have an angle of attack of less than 45 degrees, more preferably less than 20 degrees or even 10 or 5 degrees. Depending of the shape of the contour of the outer surface of the subpart, the angle of attack may well be below 1 degree.

Instead of cutting or gouging the subpart is designed to exert in a sliding motion a mechanical pressure on the borehole wall and any layer of mud cake, thereon.

Preferably, the circumference of the subpart is contoured to engage the wall along one or more lines or one or more contact areas. Thus it is adapted to have a large area of contact with the wall to ensure that, while the drill string is rotated, the outer circumference of the subpart is brought into contact with most, if not the entire wall. It will however be appreciated that under operational conditions the actual contact area may vary and the subpart's action may deviate from the ideal behavior described above.

Also the subpart is adapted to exert only minimal forces in non-radial directions. Specifically it is adapted to reduce or minimize lateral forces in direction of the axis of the borehole. The device thus generates low resistance against the progress of the drill bit and avoids scraping or cutting actions in this direction.

In another preferred embodiment of the invention the subpart includes a cylindrical section of pipe with a large central bore through which drilling fluid is pumped from the surface to the drill bit.

5

To resist the abrasive nature of the interaction with the filter cake and the cuttings, at least the parts of the surface that contact the wall of the borehole are made of a hard metal, such as steel, or include specific abrasive-resistant pads, for example pads of silicone carbide or other engineering ceramics. Preferably the flexible elements of the subparts are also made from metal, exploiting the inherent flexibility of thin metal.

10

15

In a first variant of this embodiment the outer face or circumferential surface of the subpart is contoured or shaped into a plurality of smooth wave-like protrusions separated by grooves or troughs. The shape of the protrusions is adapted to contact the borehole wall with a very low angle of attack. The grooves provide flow paths for the return flow of the drilling mud to the surface. Grooves and protrusions may be arranged in straight lines parallel to the axis of the drill string or may be wound helically around it.

20

25

In a second variant of this embodiment the outer face or circumferential surface of the subpart is essentially cylindrically with one or more flow ports tunneling through the wall of the subpart. As the width of the annulus will be reduced due to larger OD of the subpart when compared for example with the OD of a conventional drill collar, mud and cuttings can flow through the additional flow ports provided

30

while part of it will continue to pass through the reduced annulus between the subpart and the formation wall.

A subpart in accordance with the above embodiment may be advantageously placed in the vicinity of the drill collars or used as a replacement of a drill collar.

In a further preferred embodiment of the invention the subpart includes a compliant structure extending under operating conditions from a central tubular body towards the wall of the wellbore. The compliant structure may include elastic elements or flexures that exhibit a restoring force when deformed or compressed, or exert a pressure onto the wall of the borehole. The elements of flexures are preferably made from metal to increase the resistance against wear and tear downhole.

At its distal end the compliant structure carries one or more arcuate vane, pad or blade elements of metal or other structural material to engage the wall of the borehole. These vane elements may have a smoothly curved outer face to engage the wall at the required low angle of attack.

Preferably, the compliant structure includes a plurality of folding elements, such as arms, vanes or blades, that in their default state fold around the central body. Under operating conditions, preferably when activated hydraulically through the pressurized drilling fluid, the arms or blades and any parts mounted thereon expand until contacting the wall of the well. The compliant structure preferably fold back into its default position when the drilling fluid pressure drops and, hence, the normal

drilling operation ceases.

In a variant of this embodiment, the subpart includes fluid ports or nozzles fed from the interior of the drill string.

5 These nozzles can be used to direct a jet of drilling mud into a desired direction. This direction could be perpendicular or essentially tangentially to the wall of the well or along the outer contour of the pads that contact the wall. The jets may also be used to remove debris and
10 drilling mud residuals from the structure.

Several subparts in accordance with the above embodiment are advantageously distributed along the length of the bottom section of the drill string, which section is to enter the
15 newly drilled open (uncased) borehole. Thus the action of the first subpart is reinforced by other subparts passing through the same section of the well at a later time. One or more subparts may therefore be located in the drill string above the BHA and/or the drill collar section.

20 These and other aspects of the invention will be apparent from the following detailed description of non-limitative examples and drawings.

25 BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1A shows a known drilling system;

FIG. 1B shows a detail of the well of FIG. 1A ;

30 FIG. 2A is a perspective side view of a subpart of the drill string in accordance with an example of the

invention;

FIG. 2B is a top view of a subpart of FIG. 2A;

5 FIG. 2C shows the subpart of FIG. 2A,B in a well as part of a bottom hole assembly;

10 FIG. 3A,B illustrate the angle of attack and the interaction of known parts of a drill string with the formation wall in a wellbore;

FIG. 3C illustrates the angle of attack and the interaction of a tool in accordance with the present invention with the formation wall in a wellbore;

15 FIG. 4 shows a subpart of the drill string in accordance with another example of the invention;

FIG. 5 shows a variant of the subpart of FIG. 4; and

20 FIG. 6 shows a subpart of the drill string in accordance with another example of the invention.

EXAMPLES.

25 In FIG. 1, there is shown a known well drilling system for rotary drilling operations. A drill string 111 is shown within a borehole 102. The borehole 102 is located in the earth 101. The borehole 102 is being cut by the action of the drill bit 110. The drill bit 110 is disposed at the far end of a bottom hole assembly (BHA) 113 that is attached to and forms the lower portion of the drill string 111. The

30

bottom hole assembly 113 contains a number of devices including several drill collars 113-1 to increase the weight on the bit 110.

- 5 The drilling surface system includes a derrick 121 and a hoisting system, a rotating system, and a mud circulation system 130. The hoisting system which suspends the drill string 111, includes the draw works 122, a hook 123 and a swivel 124. The rotating system includes a kelly 125, a
- 10 rotary table 126, and engines (not shown). The rotating system imparts a rotational force on the drill string 111 during a rotational drilling operation in a manner well known in the art.
- 15 A mud circulation system 130 pumps drilling fluid down the central opening in the drill string 111. The drilling fluid is often called mud, and it is typically a mixture of water, or diesel fuel, special clays, and other chemicals. The drilling mud is stored in a mud pit 131. The drilling mud is
- 20 drawn into mud pumps 132 which pump the mud through the surface pipe system 133, the stand pipe 134, the kelly hose 135, and the swivel 124, which contains a rotating seal, into the kelly 125 and finally through the drill string 111 and the drill bit 110.
- 25
- As the teeth of the drill bit grind and gouge the earth formation into cuttings the mud is ejected out of openings or nozzles in the bit 110 with great speed and pressure. These jets of mud lift the cuttings off the bottom of the
- 30 hole and away from the bit, and up towards the surface in the annular space between drill string 111 and the wall of borehole 102. At the surface the mud and cuttings leave the

well through a side outlet in a blowout preventer 114 and through the mud return line 115. The blowout preventer 114 comprises a pressure control device and a rotary seal. From a cuttings separator (not shown) the mud is returned to mud
5 pit 131 for storage and re-use.

Although a system with jointed drill string 111, a kelly 125 and rotary table 126 is shown in FIG. 1, the invention is applicable to other drilling systems such as in top drive
10 drilling derricks or coiled tubing. Although the drilling system is shown as being on land, it is applicable to marine and transitions zone environments.

In FIG. 1B there is shown a part of an open hole section of the borehole 102. The section shown in FIG. 1B includes a
15 section of the drill string 111 with a tool joint 112 in the center of the open, i.e. uncased, borehole 102. The borehole traverses a porous formation layer 103 embedded within layers of impermeable rock 104. The drilling fluid is
20 circulated through the drill pipe 111 and returns loaded with cuttings through the annulus between the wall of the borehole 102 and the pipe 111 as indicated by arrows.

During the drilling operations, a small amount of the liquid
25 components of the drilling fluid are absorbed by the formation leaving behind a layer of solid particles 105. As indicated in FIG. 1B, the mud cake layer 105 is thicker across the porous formation layers 103 than across
impermeable layers 104. The mud cake layer 105 is believed
30 to enhance the stability of the well.

With regard to the present invention it was found that most

tools employed during conventional rotary drilling are not designed to make a continuous contact with the borehole wall and, thus, with the mud cake layer 105. Depending on the trajectory of the well, the drill string 111 makes

5 occasional and localized contact, for example in bends and along horizontal sections of the well. Other known tools, such as stabilizers (not shown), though exceeding the diameter of the pipe joints 112, may contact the borehole wall more often, however these contacts again are localized
10 in the sense that they do not affect the full circumference of a freshly drilled borehole. Moreover, due to the design of conventional stabilizer blades, these contacts are likely to rake into and damage the mud cake layer 105.

15 In order to preserve and possibly enhance the stability of the mud cake layer 105, the invention proposes the use of tools that exert force or pressure in a continuous or quasi-continuous manner on the wall of the borehole as the drilling operation progresses. Rather than cutting through
20 the mud cake, the novel tools are designed to slide on the filter cake gently compressing or compacting it, thus forcing more fluid or particles into the surrounding formation and/or solidifying the mud cake layer 105 not unlike wall plastering. The compacting force is exerted in a
25 radial direction, perpendicular to the wall of the borehole. The force exerted by the tool in other (lateral) directions, particularly in direction parallel to the axis of the well and drill string is minimized so as to minimize drag resistance as the tool glides further into or out of the
30 well. This can be achieved by rounding the edges of the subpart in the direction of these movements. Furthermore such edges are beneficial as reducing cutting impacts on the

wall.

According to a first example of an embodiment of the invention, a metal drill collar with a large outer diameter (OD) is inserted into the BHA. A suitable design for such an enlarged OD drill collar is shown in FIG. 2.

The subpart 230 has standard drill collar pin and box connector sections 231, 232 at its upper and lower end, respectively. These sections have an OD equal to that of the other drill collars in the BHA. In the middle section of the subpart the OD gradually increases to the larger OD of a main section 233. The main section has a cylindrical shape. Four openings 234 are drilled through the main section 233 co-axially with the main axis of the sub. The openings have a diameter that is sufficiently large to prevent blockage by cuttings. The openings provide additional flow paths for the return flow of the mud. A large central bore 235 through the sub allows drilling fluid to flow from a surface location to the drill bit (not shown).

In this embodiment, the novel subpart has no movable elements and hence a constant OD. The diameter of the outer circumferential surface of the main section 233 does not dynamically adapt to the width of the borehole or any variation therein. Hence, it is seen as being important to choose an OD that nearly matches the nominal diameter of the borehole as drilled by the drill bit.

It is generally known that the actual diameter of a borehole may not exactly match the nominal drilling radius of the drill bit for a number of reasons linked to the formation

properties and any changes introduced through the drilling process. While often the actual diameter of the well exceeds its nominal diameter, stress changes and swelling effects may cause shrinkage of the well bore diameter even in
5 absence of any major collapse of the surrounding formation. Therefore, the OD of the subpart **230** is reduced when compared with the nominal OD of borehole. The exact size of this reduction may vary depending on the drilling conditions. As however the subpart is designed to be in
10 contact with the wall of the well, the safety margin in the above example is set to 5 per cent of the nominal diameter.

Even though slightly reduced with regard to the borehole diameter, the OD of the subpart **230** still exceeds those of
15 other parts usually encountered in the assembled drill string. In FIG. 2C, there is shown a schematic drawing of the bottom part of a drill string **211** including a drill bit and a first and a second section of drill collars **213**. Between these two sections is located a subpart **230** as shown
20 in detail in FIGs. 2A and B. Above the drill collar section **213** the drill string continues to the surface as a string of jointed drill pipes having a much reduced OD.

Whilst the drill collars **213** contact the formation in an
25 irregular and spurious manner, the larger OD of the new sub ensures almost constant contact with the formation. Being firmly coupled to the drill string **211** and thus rotated with it, the cylindrical main section **233** contacts the formation and any mud cake layer in a rolling motion describing a
30 circular, or more precisely, a helical path on the wall of the borehole as the drill bit **202** penetrates through the formation.

In the above-described example, the angle of attack at which the circumference of the subpart contacts the formation is a function of the radius of the subpart and the radius of the borehole. Though in a strictly mathematical sense the two surfaces meet at an angle of attack that differs by an infinitesimally small amount from zero, the actual macroscopic angle of attack is small but finite, and may vary. It is estimated to range between 0.5 and 1 degrees.

The angle of attack is further described in FIG. 3, showing the formation wall 301 in interaction with the circumferential surface of known parts of a drill string, such as joints and stabilizers, and the outer circumferential surface 333 of the main body of the novel subpart of FIG. 2. The dashed line or plane 302 tangential to the wall 301 at the point or line of contact indicates an angle of attack of zero degrees.

In FIG. 3A, there is shown a drill string joint 311 of a conventional drill string contacting the wall 301. The tangential plane 302 to the point of contact 303 is shown as a dashed line. Without considering deformations or indentation the angle of attack is zero. However the actual angle of attack 304 as shown may be slightly larger due to the manner in which the surface 311 and the wall 301 engage under downhole operation conditions. Nonetheless the actual angle of attack 304 is small compared to the angle of attack of a stabilizer sub as illustrated in the following FIG. 3B.

A part of a stabilizer 312 is shown engaging the wall 301 at the point of contact 303. The edge 313 of the stabilizer

attacks the formation at an angle of attack 305 of approximately 80 degrees, using again the tangential plane 302 as reference.

5 In FIG. 3C there is illustrated the angle of attack 306 of a subpart in accordance with the present invention as described for example in FIG. 2. The radius of curvature of the subpart 333 is close to the radius of curvature of the formation wall, and, hence, the actual angle of attack 306
10 is extremely small and can only be shown in an exaggerated manner. By making assumptions as to the thickness of the mud cake layer the angle of attack can be estimated to be below 1 degree or less than 0.5 degrees.

15 A second example of a subpart in accordance with the present invention is shown in FIG. 4. The subpart 430 includes a bottom and upper section 431, 432, respectively, providing box and pin connection to the remainder of the drill string (not shown). A main body 433 of the subpart comprises two
20 frusto-conical sections with a cylindrical middle section similar to a bobbin. The conical sections include the bearings for four hinges 434. Mounted onto each of the hinges is a steel vane or pad element 435 having a flat arcuate shape with rounded edges to reduce forces against
25 any lateral movement of the subpart.

The hinges 434 are spring-loaded to force the four pads to fold tightly around the main section in the absence of hydraulic pressure. The drilling fluid provides the
30 hydraulic pressure as it is pumped from a surface location through the drill string. The pressurized drilling fluid activates internal cylinders (not shown) that rotate the

vanes 435 around the hinges thus bringing their distal ends closer to the wall of the borehole. While the drill string remains in a centered position within the borehole, the rollers are designed to provide the first area of contact between the subpart 430 and the formation wall. The hinge-mounted vanes or pads 435 are configured to bend or flex as the radial distance between the drill string and the wall varies during the drilling operations, so as to remain in permanent contact with the wall.

During the drilling process, the drill string including the subpart 430 are rotated from the surface, and the subpart continuously exerts pressure on the formation wall and any mud cake layer on its surface. When the drilling terminates and the pressure inside the drill string drops, the vanes 435 fold back around the main body 433 to facilitate a subsequent tripping operation.

In a variant of this example illustrated in FIG. 5 flexible tubes are incorporated into the vanes 535. The tubes terminate in nozzles 537 located at the center of the pads. Other elements in FIG. 5 bear reference numerals equivalent to those of FIG. 4 to the extent they are equivalent in structure and function and are hence not further described.

In operation these tubes are fed by pressurized drilling fluids through ports (not shown) from the inside of the drill pipe. The jets 538 of drilling fluids from the nozzles can be used to spray the formation. Or they can be directed against sections of the subpart to lubricate or remove deposits on those sections.

A further variant of the example of FIG. 4 is shown in FIG. 6. As in the previously described example the subpart 630 includes a bottom and upper section 631, 632, respectively providing box and pin connection to the remainder of the drill string. The main body 633 of the subpart comprises two frustro-conical sections with a cylindrical middle section similar to a bobbin. The conical sections include the bearings for four hinge elements 634. Mounted onto each of the hinges is a first inner arm section 635 having an arcuate shape with a depressed central area along its length. At the distal end of the first arm section there is mounted a second outer arm section 637 on a second hinge 636. The second outer arm section is arcuate, thus contacting the wall of the formation with a high rake angle. The edges of the outer arms 637 are rounded to prevent the arms from damaging the mud cake during when moving deeper into the well bore during drilling.

The hinge elements 634, 636 are spring-loaded to force both arm sections 635, 637 to fold tightly around the main section 633 in the absence of hydraulic pressure. The drilling fluid provides the hydraulic pressure as it is pumped from a surface location through the drill string. The pressurized drilling fluid activates cylinders (not shown) that unfold the arm sections until the outer arm meets resistance by the borehole wall. The arcuate blade-like arms 635, 637 are made of metal and exhibit sufficient inherent flexibility to ensure that the arms 635, 637 engage the wall without causing damage to mud cake, formation or to the arms themselves. The curvature of the blades again is chosen such that the angle of attack with which it engages the wall of the borehole is below 1 degree.

A novel subpart with compliant elements such as illustrated by FIGs. 4-6 can be assembled into a drill string at any desired location. The subpart could be made part of the BHA or could be assembled into the drill string at a location above the BHA and the drill collars. It is possible to include several of these subparts in a drill string and thus repeat the compacting operation the subpart perform on the mud cake several times over, thus reinforcing the action of a previous subpart.

While the invention has been described in conjunction with the exemplary embodiments described above, many equivalent modifications and variations will be apparent to those skilled in the art when given this disclosure. For example, one may replace the arcuate arms of the example above by cylindrical or cone rollers. Accordingly, the exemplary embodiments of the invention set forth above are considered to be illustrative and not limiting. Various changes to the described embodiments may be made without departing from the spirit and scope of the invention.

CLAIMS

1. A subpart of a drill string, the subpart including
an outer circumferential surface which is contoured
5 and adapted to engage a wall of an open uncased
borehole in a sliding action with a low angle of
attack essentially continuously exerting a
compacting pressure on mud cake and/or cuttings
present in the annulus between the drill string and
10 said wall.
2. The subpart of claim 1 comprising a bottom and top
section for connection to the drill string and a
main section having an inner central bore for the
15 passage of drilling fluid from the surface and one
or more outer openings for said drilling fluid and
cuttings return flow to the surface wherein an outer
contour of said subpart is shaped to engage the open
uncased wall of said borehole at an angle of attack
20 of less than 45 degrees and extends to an outer
diameter of more than 70% of a nominal diameter of
said borehole.
3. The subpart of claim 2 comprising a cylindrical main
25 section having an outer diameter of more than 70% of
the nominal diameter of the borehole and one or more
bores providing a return flow path for the drilling
fluid and cuttings.
- 30 4. The subpart of claim 1 having an outer
circumferential surface which is contoured and
adapted to minimize laterally acting forces or

resistance during a sliding action.

5. The subpart of claim 2 having one or two connectors adapted to connect to a drill collar section of the drill string.
5
6. The subpart of claim 2 having a bottom and top section for a force-transmitting connection to the drill string thus following a rotational motion of the drill string generated at a surface location.
10
7. The subpart of claim 1 wherein the contoured surface is made from an abrasive resistant material.
- 15 8. The subpart of claim 1 or 2 having a central main section and two or more extendable elements adapted to simultaneously extend under drilling condition to contact the wall of the borehole.
- 20 9. The subpart of claim 8 wherein the two or more extendable elements engage under drilling conditions the wall of the borehole at an angle of attack of less than 45 degrees.
- 25 10. The subpart of claim 8 wherein the two or more extendable elements include compliant elements.
11. The subpart of claim 8 wherein the two or more extendable elements are adapted to engage the wall of the borehole when pressurized drilling fluid is pumped from a surface location through the drilling
30

string.

12. The subpart of claim 8 wherein the two or more extendable elements include one or more nozzles
5 connected by a flow path to the inner opening of the subpart.
13. The subpart of claim 8 wherein the two or more extendable elements include one or more hinge
10 sections.
14. The subpart of claim 8 wherein the extendable element comprises a first extendable section and a second extendable section and a hinge element
15 connecting said first and second extendable sections.
15. The subpart of claim 8 wherein the extendable element comprises an arcuate vane element rotatably
20 mounted on a hinge element.
16. The subpart of claim 8 wherein the extendable element comprises a first extendable section and a second extendable section and a hinge element
25 connecting said first and second extendable sections.
17. A drill string comprising in a section that passes through the open uncased borehole one or more
30 subparts in accordance with any of the preceding claims.

18. A drill string of claim 17 comprising one or more subparts in accordance with any of the preceding claims with at least one of said subparts being at a location in said drill string above a bottom hole assembly including drill collars.

19. A drill string of claim 17 comprising a plurality of subparts in accordance with any of the preceding claims located at intervals along the open hole section of the drill string.

20. A method of consolidating a borehole during a drilling operation comprising the steps of

- assembling a drill string including one or more subparts each having an outer circumferential surface which is contoured and adapted to engage a wall of an open uncased borehole with a low angle of attack essentially continuously exerting a compacting pressure on mud cake and/or cuttings present in the annulus between the drill string and said wall;
- pumping from a surface location a drilling fluid; and
- rotating said drill string from said surface location; thereby causing the subpart or subparts to slide along the wall of the borehole.

21. The method of claim 20 wherein the outer circumferential surface of the one or more subparts is essentially continuously forced into contact with the wall surrounding the borehole during the drilling operation.

22. The method of claim 21 using pressurized drilling fluid to force the outer circumferential surface into contact with the formation.

1/9


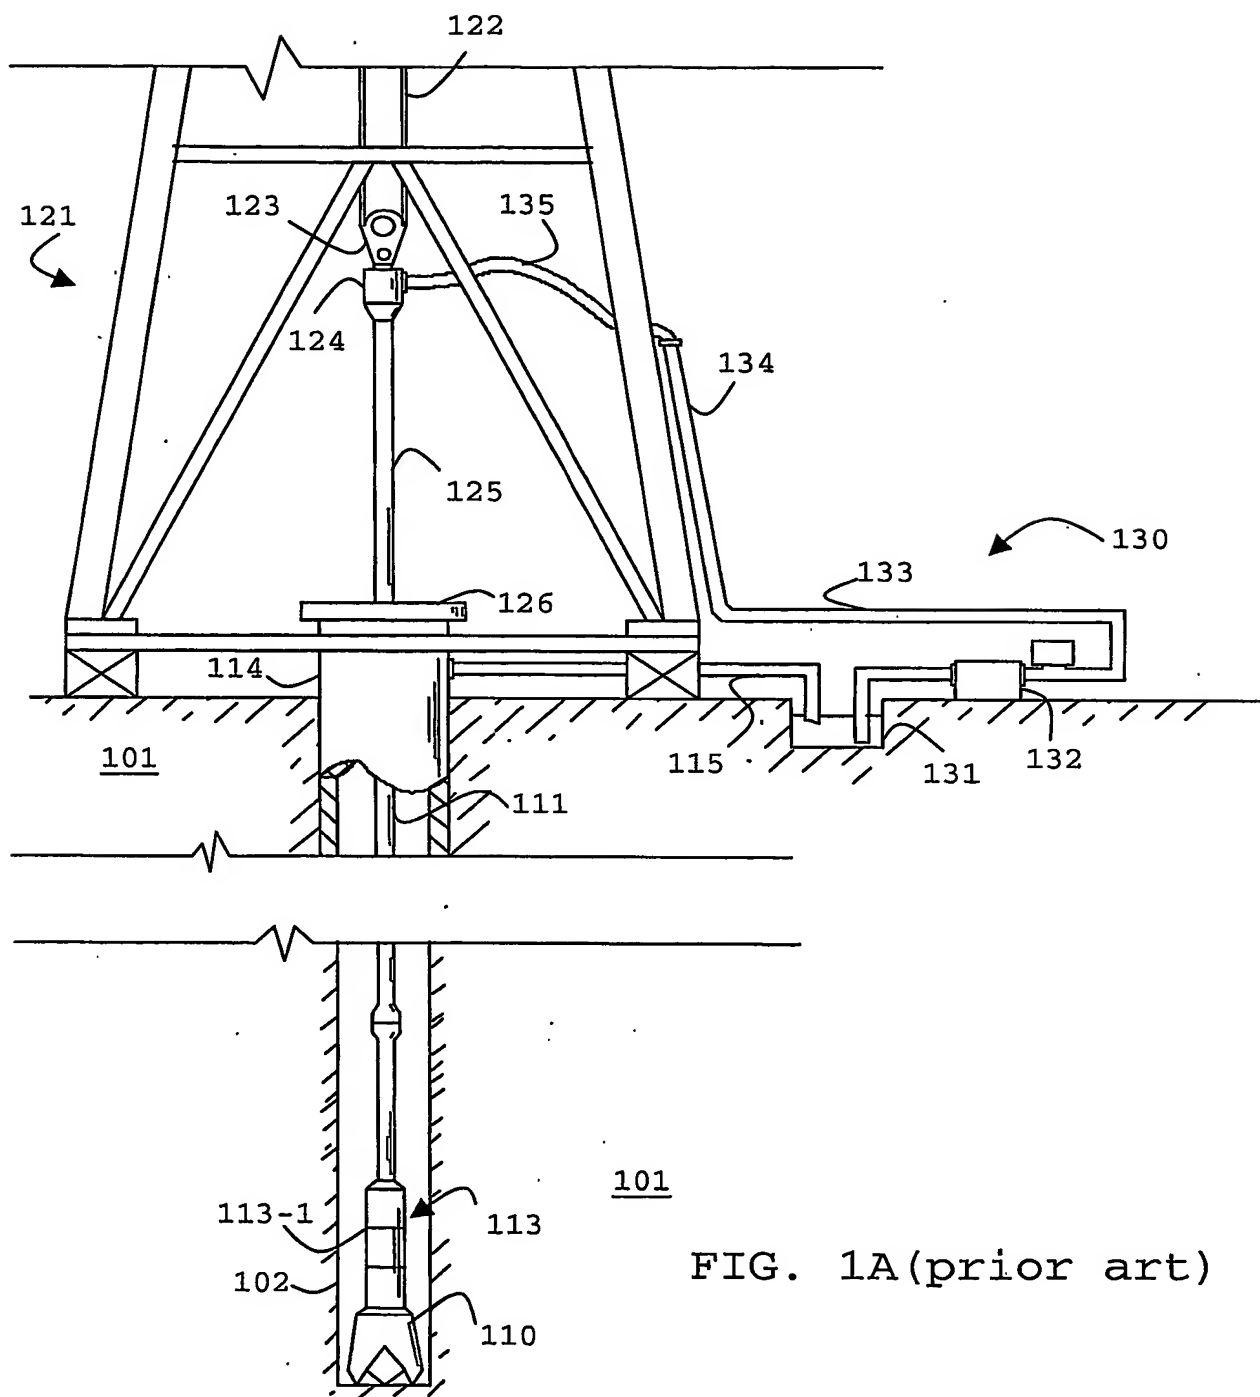




FIG. 1A (prior art)

2/9

FIG. 1B(prior art)

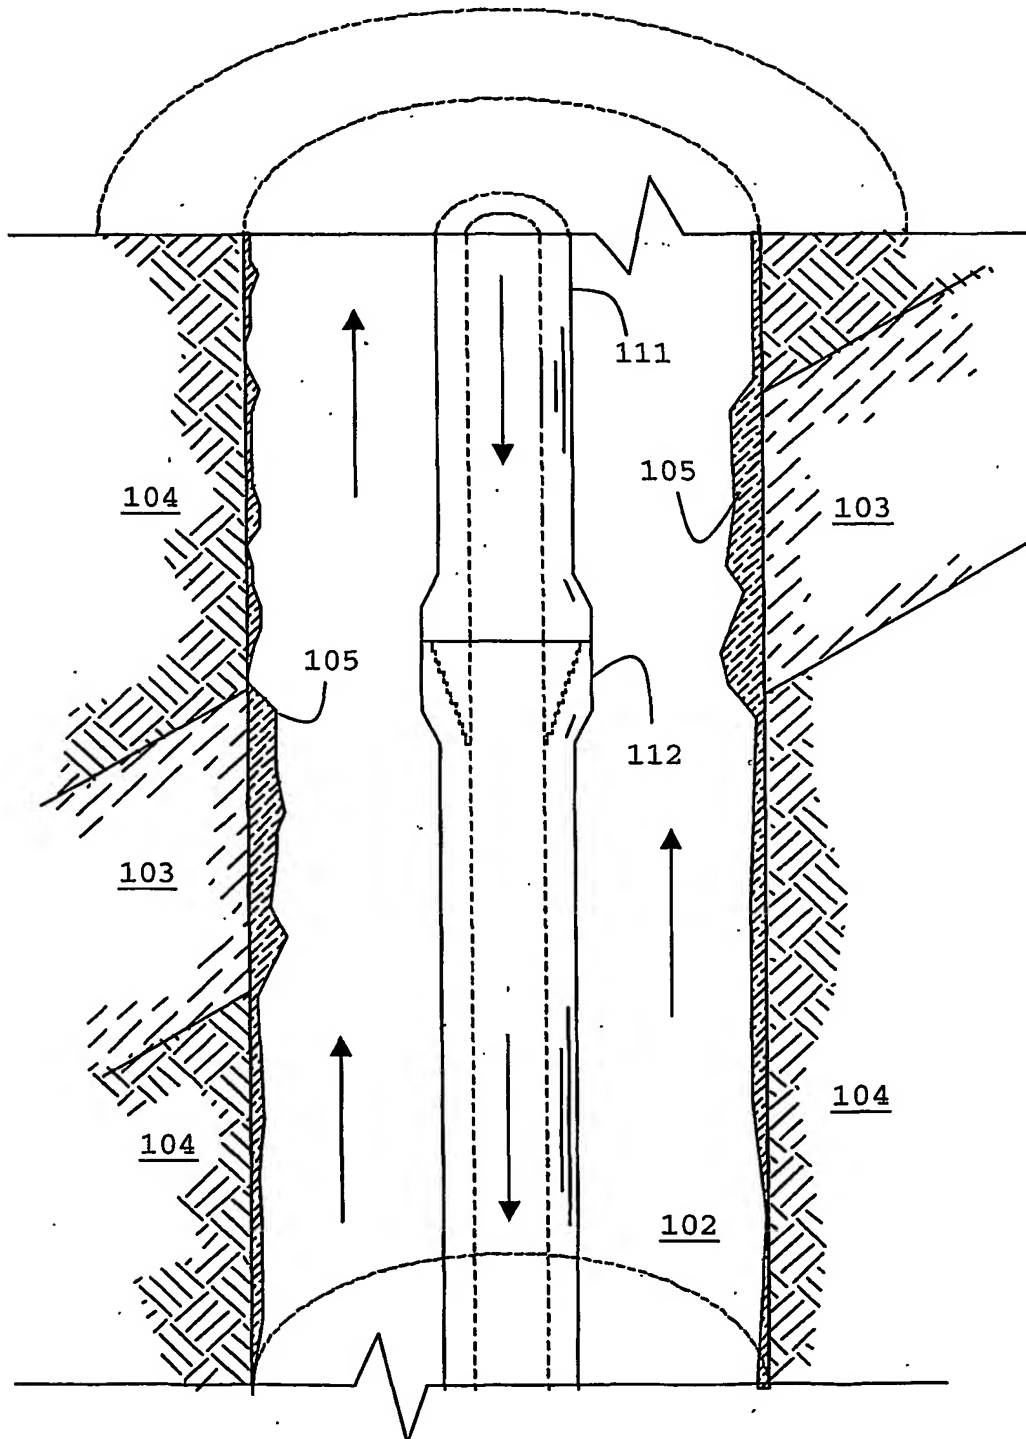

3/9

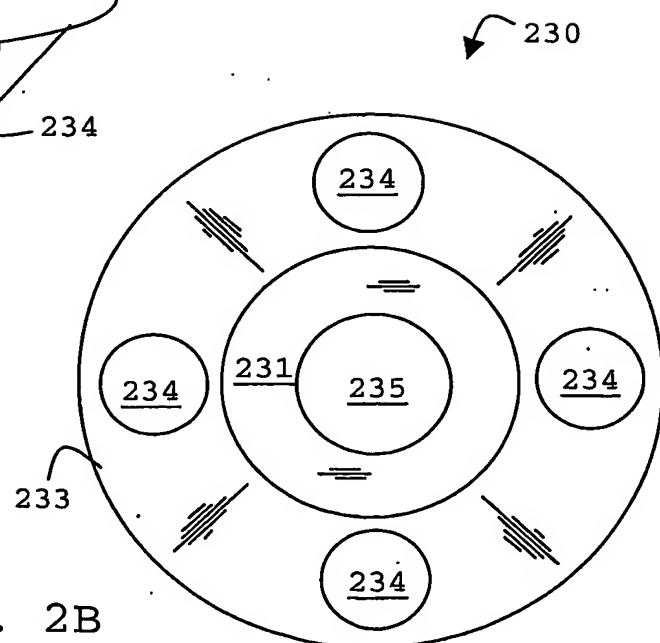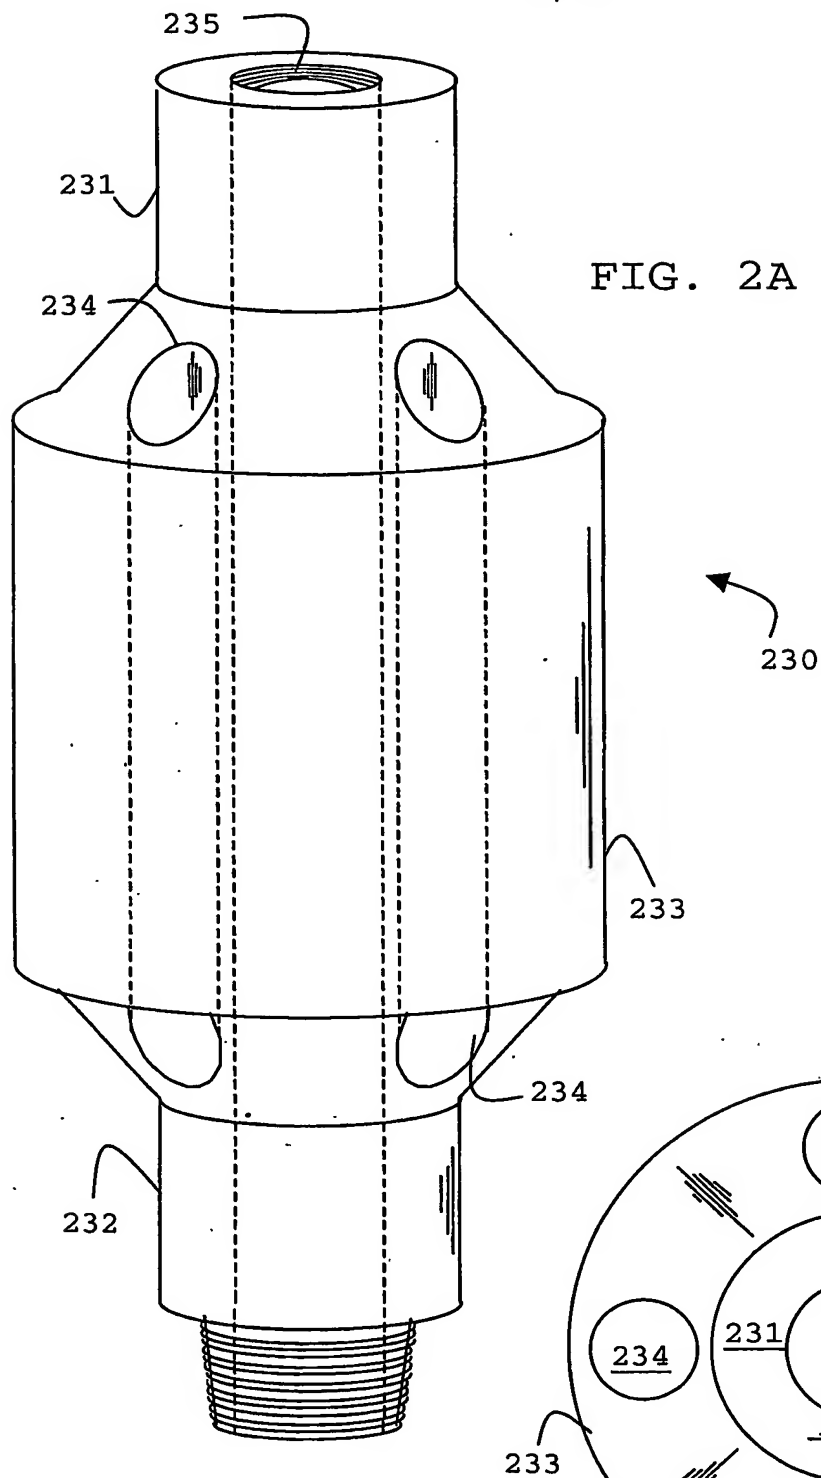

4 / 9

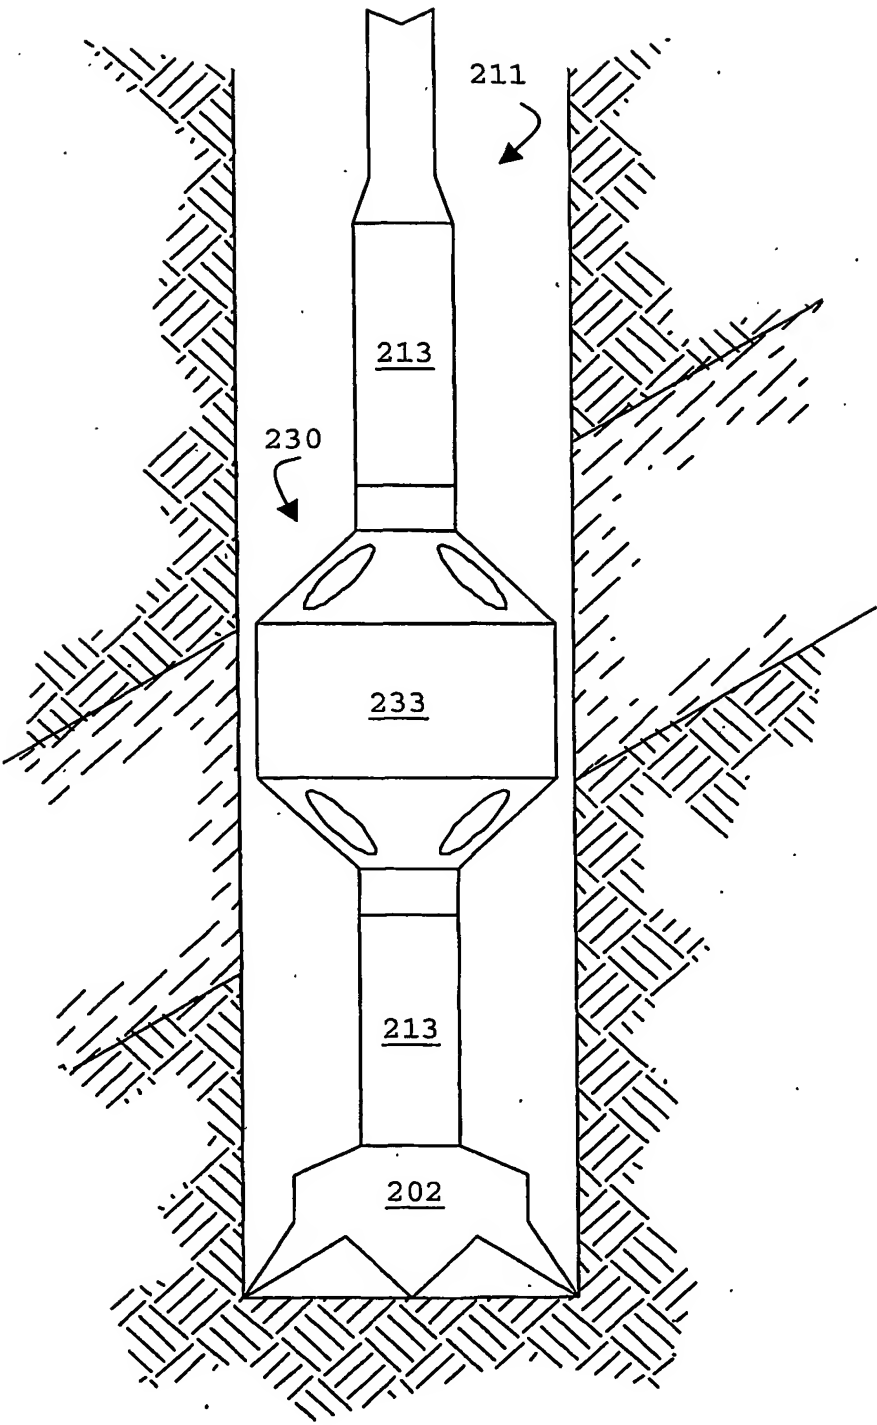


FIG. 2C

5/9

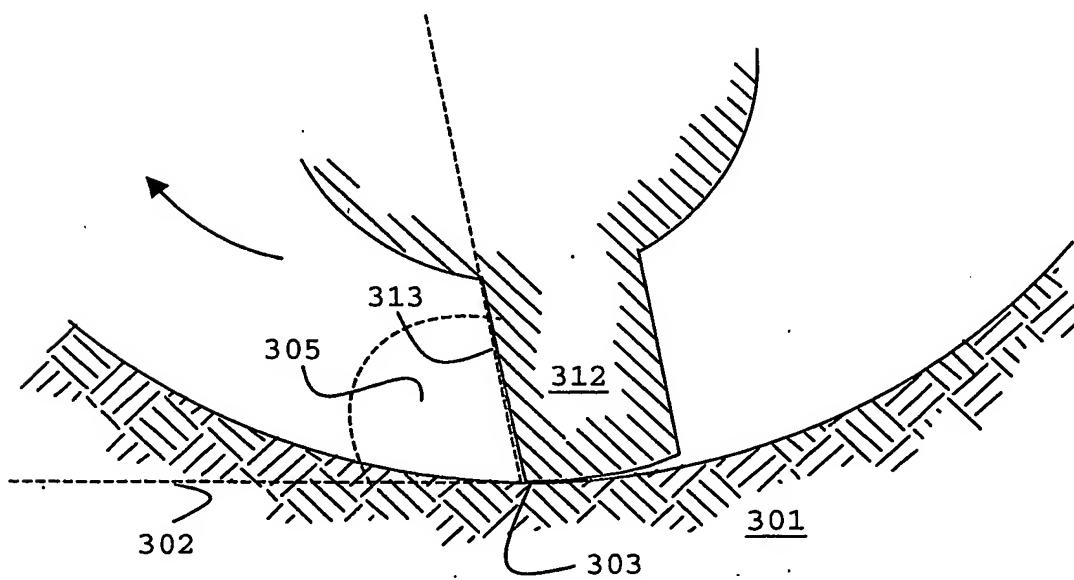
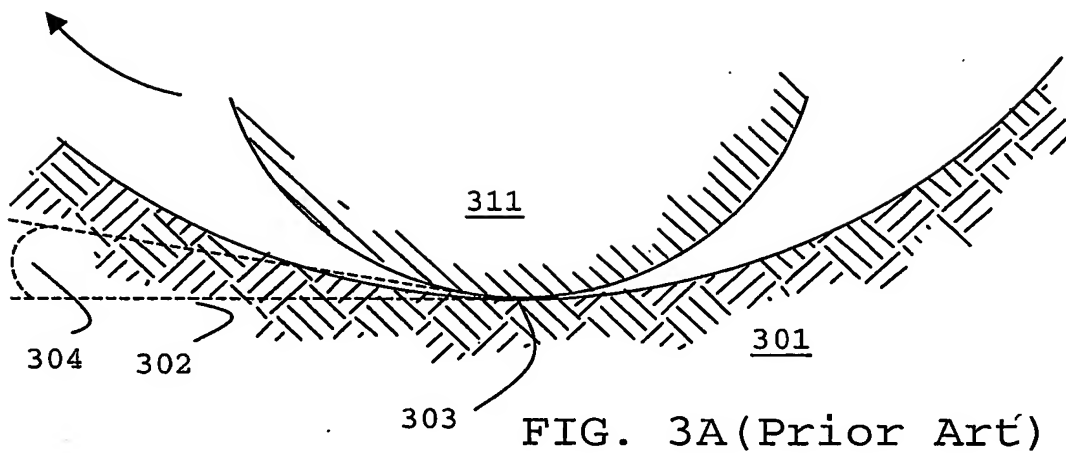


FIG. 3B (Prior Art)

6/9

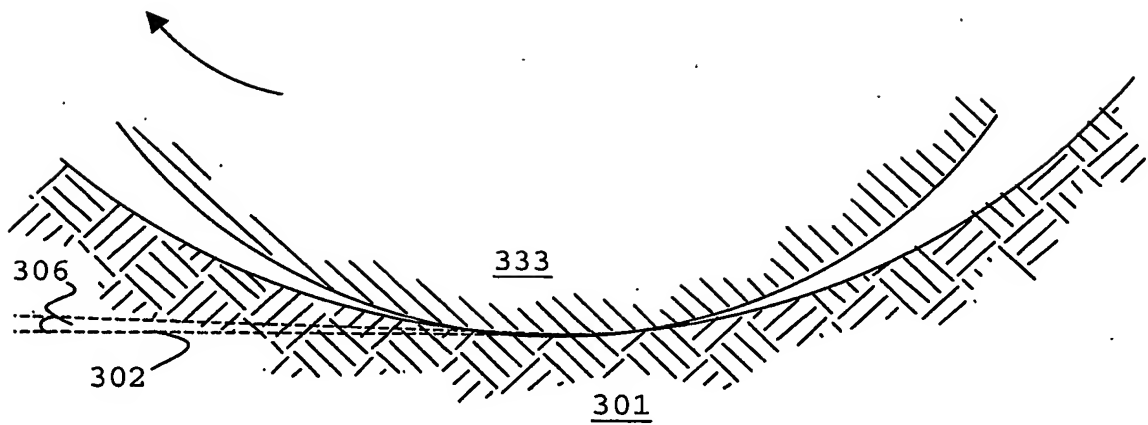


FIG. 3C

7/9

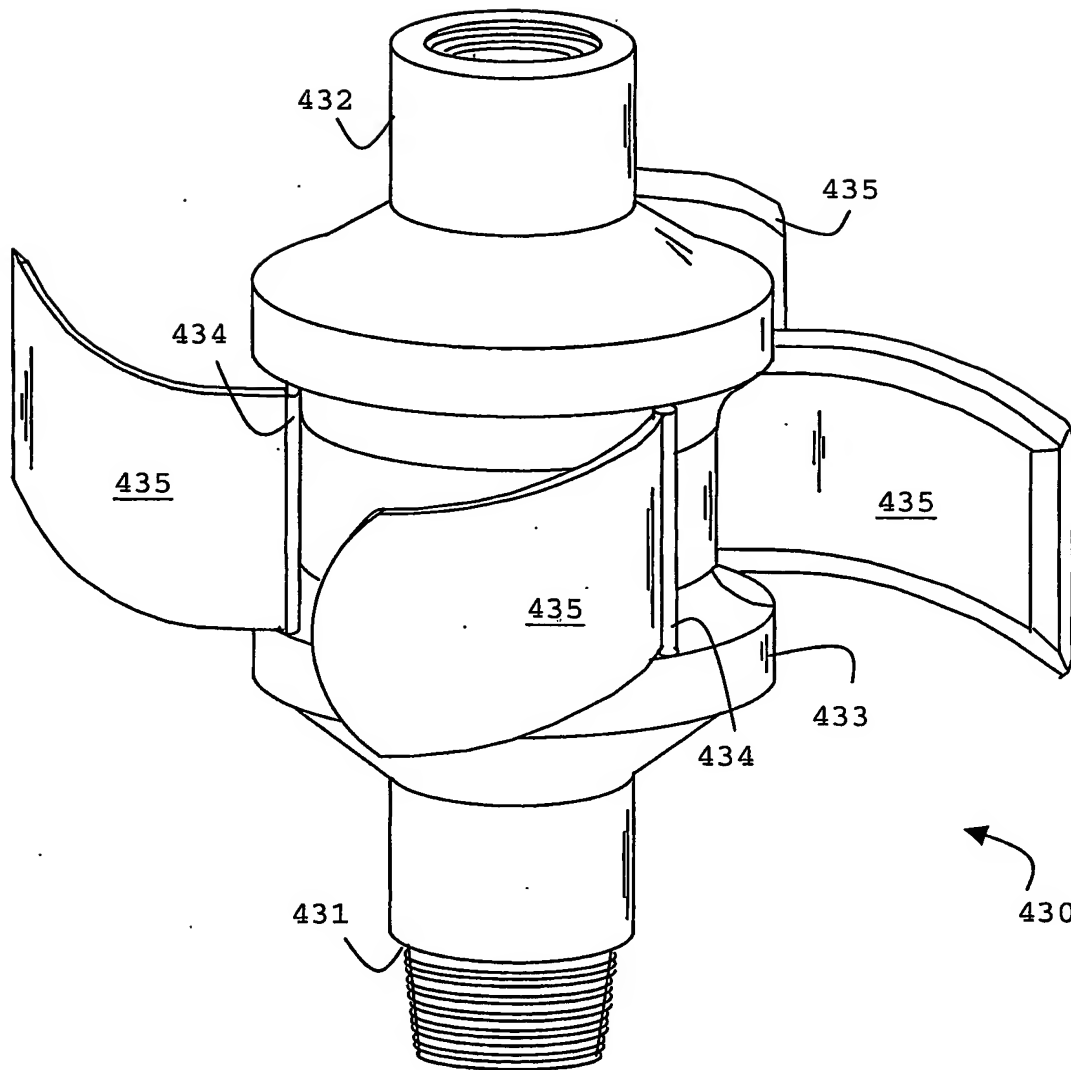


FIG. 4

8/9

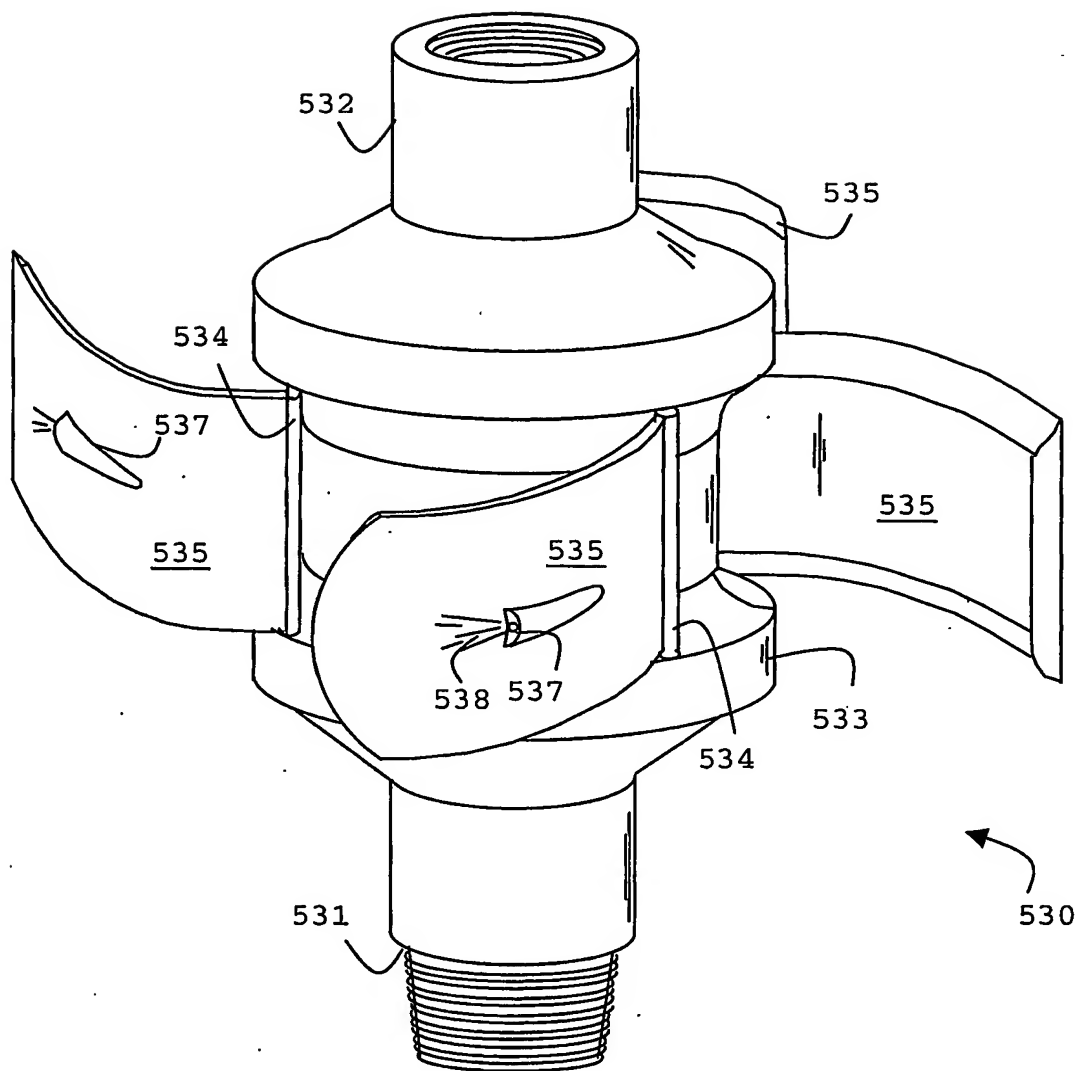


FIG. 5

9/9

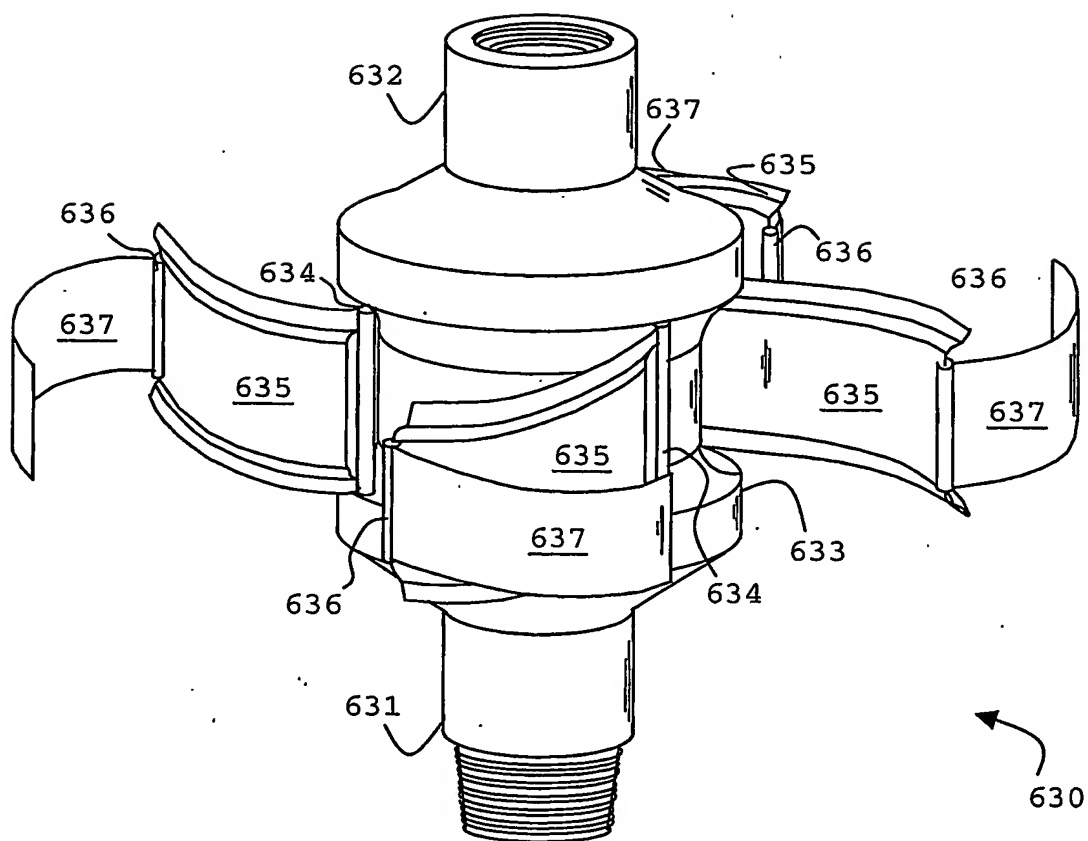


FIG. 6

INTERNATIONAL SEARCH REPORT

Internat PC	Application No 03/05520
----------------	----------------------------

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 E21B33/138 E21B17/10 E21B21/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 E21B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2 776 111 A (JAMES VANCE) 1 January 1957 (1957-01-01) column 4, lines 6-7; figures 3,4,6	1-7, 17-21
A		8-16,22
A	SU 1 361 304 A (KB POLT INST KUJBYSHEVA) 23 December 1987 (1987-12-23) cited in the application the whole document	1-22
A	US 4 049 066 A (RICHEY VERNON T) 20 September 1977 (1977-09-20) the whole document	1-22

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

31 March 2004

Date of mailing of the international search report

07/04/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Georgescu, M

INTERNATIONAL SEARCH REPORT

on patent family members

Internat

Application No

PCT

03/05520

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 2776111	A	01-01-1957	NONE	
SU 1361304	A	23-12-1987	SU 1361304 A1	23-12-1987
US 4049066	A	20-09-1977	NONE	